


Copyright © ICY DOCK International. All Rights Reserved.

Cremax Europe GmbH
Email: support@icydock.com
Weidenweg 21H, 47059 Duisburg, GermanyBeyond Technologies UK Ltd
Email: info@beyondtech.co.uk
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.


1

Package Contents • Packungsinhalt • Contenu • Contenido del paquete

• 包装について • 包装説明 • 包装说明



Device



User Manual



1 x #6-32*5 for Device


Full & Half Height Expansion
Slot Faceplate① **Note:** Please use the included screws to secure the device.

2

Device Information • Geräteinformationen • Informations dispositif

• Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Front View

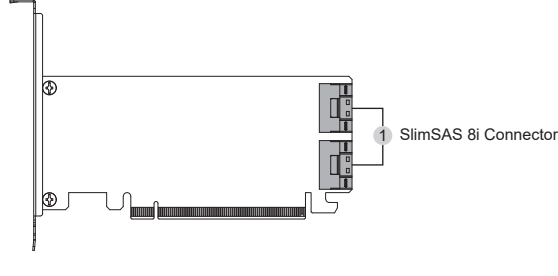


3

Device Installation • Installation eines Gerätes • Installation du dispositif

• Instalación del dispositivo • デバイス取付手順 • 装置安裝步驟


• 设备安装步骤

3-1

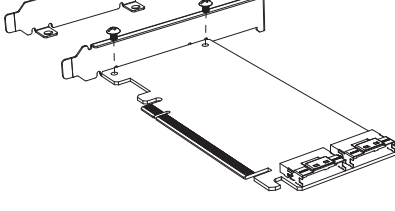

Select the Full/Half Height Expansion Slot Faceplate according to the chassis I/O space specifications, and secure it to the adapter with two bracket screws.

3-2

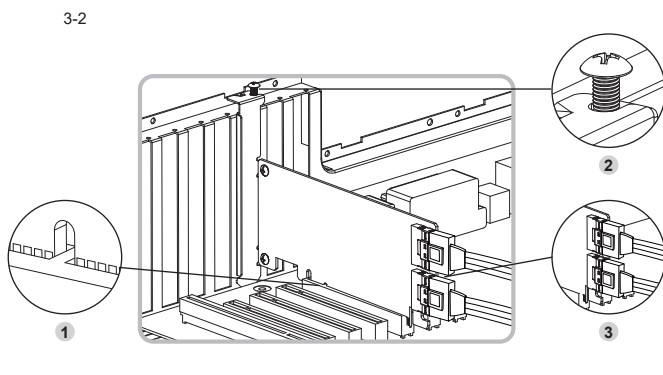① **Note:****1.Safety First:** Before any hardware installation, please ensure all power is switched off and cords are disconnected for your safety and to protect the equipment.**2.Handling Adapter:** Kindly handle the circuit boards with care, as they are sensitive to static. We strongly advise grounding yourself before touching to avoid electrical damage.**3.Securing the Adapter:** Please use the included screws to secure the device firmly in place.**4.Cable Management:** When disconnecting cables, always gently press the overmold to release the connector latches. This helps prevent any harm to the cable or connector.**5.Device Placement:** Please place the adapter in a safe location, away from magnetic fields, high voltage, direct sunlight, and moisture to ensure its longevity.

Technical Specification:

Model	MB308A
Compatible Drive Type	NVMe
Support Slots	Works with x16 PCIe 2.0/3.0/4.0 or 5.0 slots on motherboards, (motherboard required PCIe x16 slots bifurcated into x4/x4/x4/x4)
Host Interface	1 x PCIe x16 connector
Endpoint Interface	2 x SlimSAS 8i(SFF-8654) , pin-out defined by SFF-9402 Rev 1.1
Transfer Rate	PCIe 4.0 x 16 up to 256Gbps
Supported Operating Systems	No limitation
Package Contents	Device, mounting screws, user manual
Compliance	CE, UKCA, RoHS, REACH
Warranty	2 years warranty

**Warranty**
icydock.com/warranty**Product Info**
Specs/Manual/Compatibility

ICY DOCK reserves the right to change product specifications, components, or accessories without prior notice.